




Ecodeck Rubber Safety Matting

Specification Sheet

Our Ecodeck Rubber Safety Matting is supplied with 4 pegs and 8 ties for a simple & quick installation. Tested by RAPRA with a critical height fall of 3m, it also absorbs shock and noise to enhance safety. Our matting is slip resistance and complies with the Disability Discrimination Act and has been passed by the European P.A.H.

Sustainability factors into all our products, complies to SUDS Regulations and the Flood and Water Management Act 2010.

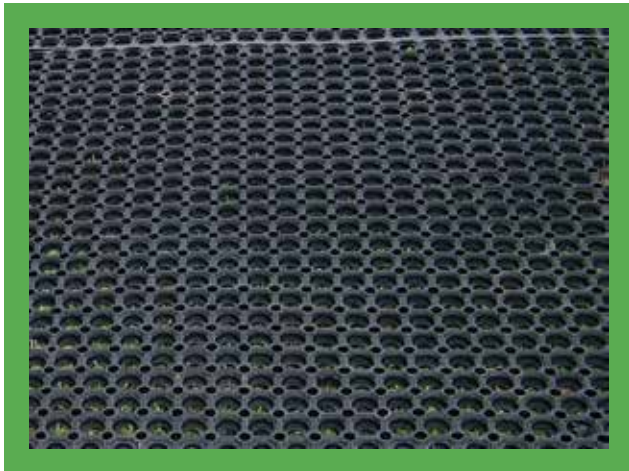

PRODUCT INFORMATION

Material	Recycled rubber
Dimensions	1.5m x 1m x 23mm
Opening Dimensions	2.5cm wide openings
Weight/mat	14kg
Filling	Gravel, Stone, Grass, Grass Seed, Soil, 3mm-30mm
Temperature Stability	-49°C - +49°C
Fitting	Supplied with 4 pegs and 8 ties
Environmental	SUDS Compliant
Country of Manufacture	UK
Shipping Details	60 mat's per pallet
Vehicle Testing	tested by RAPRA with a critical fall height of 3 meters
Extra	Slip resistant, shock and noise resistant, complies with the disability discrimination act, European P.A.H passed.